


CUSTOMER TERMINAL	ROHS	Lead(Pb)-free
	YES	YES



A PASSION
FOR TECHNOLOGY


1.Mechanical Dimensions

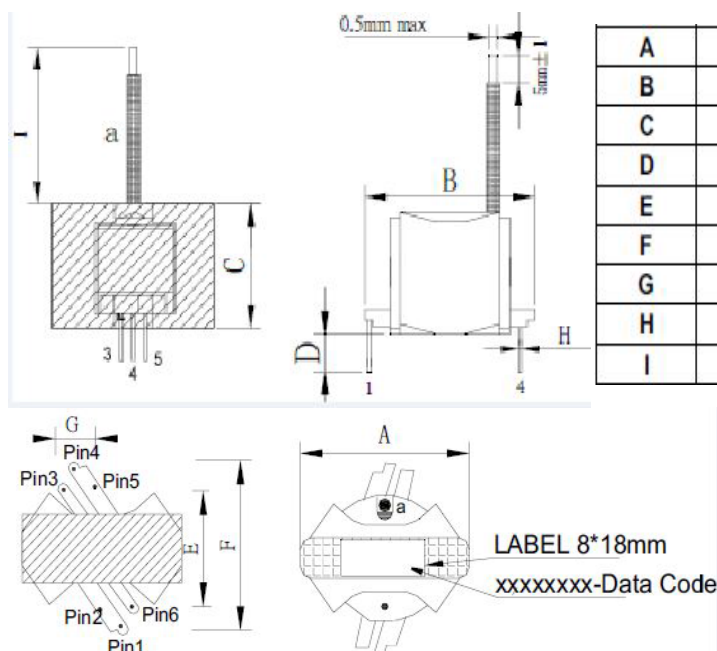

3.Material List

Core:FW44 RM5
 Bobbin:FWB0501(3+3PIN)
 Wire:2UEW
 Operating Temperature: -30 to115 °C

2.Schematic Diagram

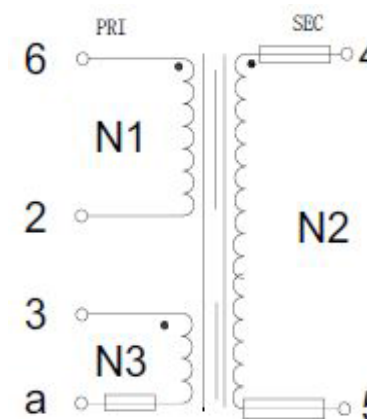

4.Electrical Specification

Inductance : $L(6-2):3.4mH \pm 5\% 50KHZ, 1.0V$
 Leakage inductance : $240uHMAX 50KHZ, 1.0V$
 DCR : $(6-2)=8.5\Omega MAX$
 Hi-Pot:P-S: AC 60Hz 1000V 1mA 3S

REV.	DATE	 Convention Placement	DRW.		Drawing Title:	Part No:
0	00/00		CHK.			
			APP.		Customer P/N	FWPTRM5V342J
ROHS		www.fosopower.com			Specification Sheet 1 of 1	

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION