


CUSTOMER TERMINAL	ROHS	Lead(Pb)-free
	YES	YES



A PASSION
FOR TECHNOLOGY

1.Mechanical Dimensions

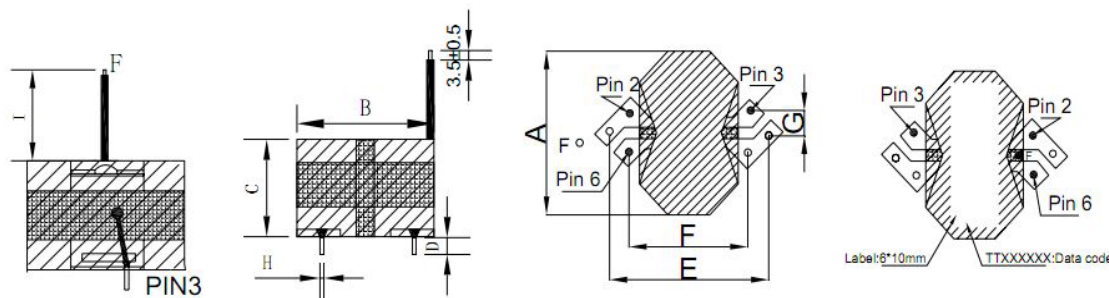

A	19.5	MAX
B	21.0	MAX
C	14.5	MAX
D	3.5	±0.5
E	18.0	±0.4
F	14.4	±0.4
G	1.80	±0.3
H	0.50	±0.1
I	23.00	±2.0

3.Material List

Core:FW44 RM6


Bobbin:FWB0601(3+3PIN)

Wire:2UEW

Copper foil:0.025*3.0/5.0mm

Operating Temperature: -30 to115 °C

2.Schematic Diagram

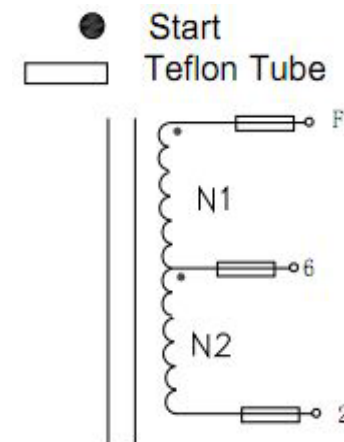

4.Electrical Specification

Inductance : L(F-2):110uH±5% 100KHZ , 0.6V

DCR : (F-2)=133.16mΩ MAX

Hi-Pot:COIL-CORE: AC 60Hz 1000V 1mA 3S

REV.	DATE	 Convention Placement	DRW.		Drawing Title:	Part No:
0	00/00		CHK.			
			APP.		Customer P/N	FWPTRM6V111J
ROHS		www.fosopower.com				Specification Sheet 1of 1

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION