


CUSTOMER TERMINAL	ROHS	Lead(Pb)-free
	YES	YES



A PASSION
FOR TECHNOLOGY


1.Mechanical Dimensions

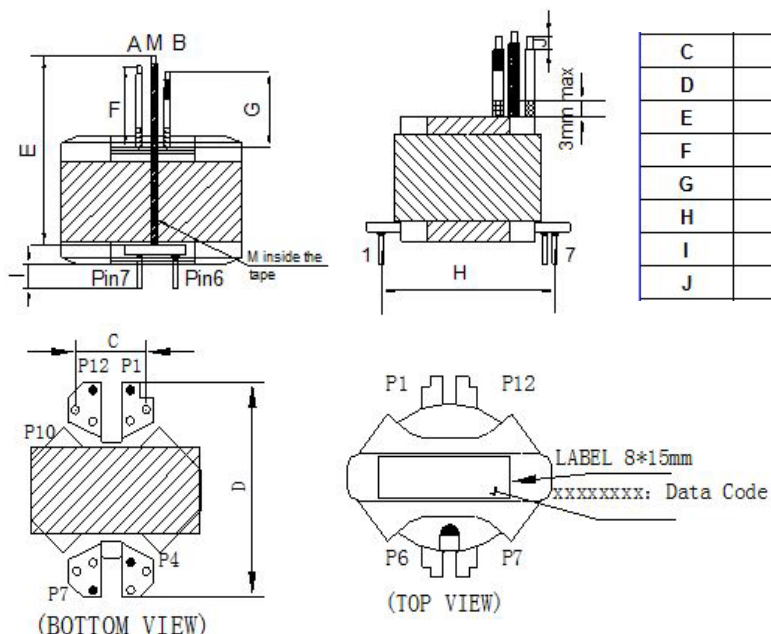

3.Material List

Core:FW44 RM8
Bobbin:FWB0804(6+6PIN)
Wire:2UEW TIW
Operating Temperature: -30 to115 °C

2.Schematic Diagram

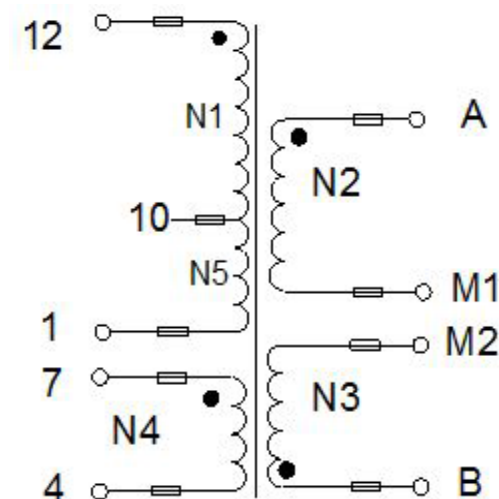

4.Electrical Specification

Inductance : $L(12-1):3400\mu H \pm 5\%$ 100KHZ , 1.0V
Leakage inductance: 40uH MAX 100KHZ , 1.0V
DCR : (A-M)=0.4Ω MAX (12-1)=2.5Ω MAX
Hi-Pot:P-S: AC 60Hz 4000V 1mA 3S
S-CORE:AC 60Hz 4000V 1mA 3S

REV.	DATE	 Convention Placement	DRW.	Drawing Title: TRANSFORMER	Part No: FWPTRM8V342J
0	00/00		CHK.		
			APP.		
ROHS		www.fosopower.com		Customer P/N	Specification Sheet 1of 1

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION